


ADD-PCIE-2SFP

Dual Port Open SFP 1000BASE-LX,SX

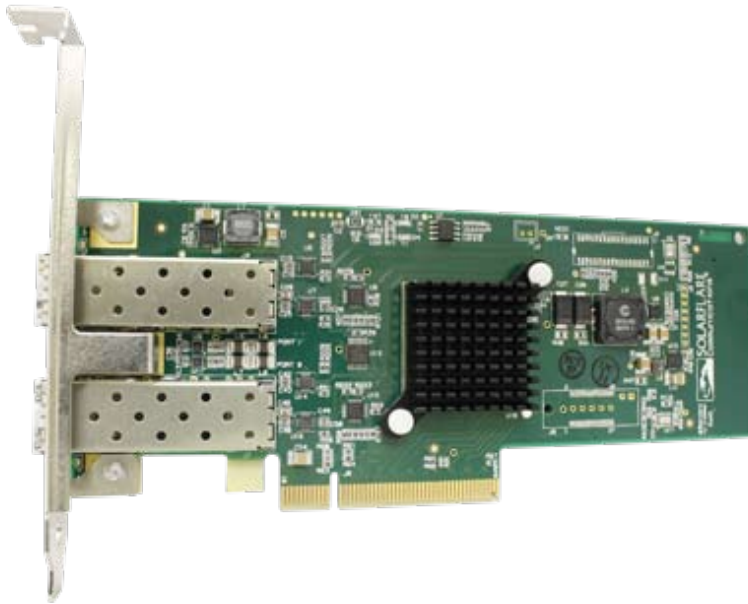

Features

- 2 SFP open port slots
- LEDS indicators for link / Activity Mode
- Supports 1000Base-LX, SX
- Deep packet buffer per channel lowers CPU utilization
- Controllers offload TCP/UDP/IP checksum calculations
- Small Form Factor Pluggable (SFP) Cage for SFP LC connectors
- Virtual LANs-802.1q VLAN tagging
- Compliant with PCI E Rev.1.1 Interface
- 802.x Flow control
- Supports PCI E X4 bus

Specifications

Products Type	Server Network Card
Bus Interface	PCI-E X4
Operating Distance	Single-Mode: 10Km at 9um Multimode fiber: 550m at 50 um 550m at 62.5um
Network interface type	SFP Slot*2 (1000BASE-SX, 1000BASE-LX), LC fiber
Transmission speed (Mbps)	1000
Transmission medium type	Fiber
Network standard	IEEE802.3 (1000BASE-SX, 1000BASE-LX)
PCI Connector	Gold Finger: X4
Compatible operating system	Windows XP Linux FreeBSD VMware
Working Temperature	-5°C - 40°C
StorageTemperature	-40°C - 65°C